


# Roof Walkway Matting

Heavy duty matting designed for use on roofs

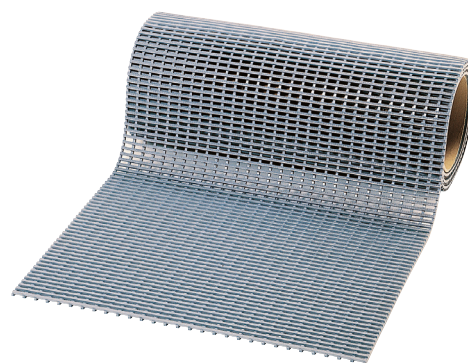

Watco Roof Walkway Matting is specifically designed as a safe walkway for flat roofs in all weather conditions. Its robust, heavyweight construction holds it in place so there is no need for fixing. The 14mm thick, anti slip tread and open grid self-draining system provides permanent slip resistance even in areas where water may pool.

Watco Roof Walkway Matting is compatible with vinyl roofing membranes, easy to lay and completely maintenance free.




**Areas of use:**

- All flat or gently sloping roofs

**Features:**

- Permanent slip resistance
- UV resistant
- Designed and weighted to withstand strong winds (tested to 94mph)
- Protects roofing membranes
- Self draining open grid design
- No fixings required
- Available in rolls:  
10m x 14mm thick and 600mm / 910mm / 1220mm wide

**Colours**



Light Grey



Black



Yellow



White

Samples are available on request. While great care is taken with the colour samples shown, no guarantee can be given that they represent exactly the colours offered.

## Need help? Speak to the experts

Our dedicated and professional team are here to help you get the best results for your project. They will talk you through the preparation and application stages when using **Roof Walkway Matting**.

Call our expert team on: **01483 418 418** (Weekdays 8:00am - 5:30pm. Saturday 9:00am - 12:00pm)



# Roof Walkway Matting

Heavy duty matting designed for use on roofs

## Specification

<b>Appearance</b>	Heavy duty, flexible PVC.
<b>Availability</b>	Available in rolls 14mm thick: 10m x 600mm - 10m x 910mm - 10m x 1220mm
<b>Weight</b>	6.6kg/m <sup>2</sup>
<b>Life Expectancy</b>	Is equal to or will exceed modern flat roofing materials.
<b>Chemical Resistance</b>	Resists most acids, alkalis and oils. For further assistance please contact Watco Technical Department.
<b>Fire Resistance</b>	DIN 4102 Part 1 – Classification B2.
<b>Slip Resistance</b>	58 PTV (Wet)
<b>Thermal</b>	Can be used in temperatures from minus 20°C to 60°C.